


A353DMS

ATI RC350+IXP 300 CHIPSET With AGP 8X slot & with 6-CH AC'97 CODEC / ATA100/ USB2.0/ LAN /DDR400 Support Pentium 4 800MHz processor Micro ATX Main Board


Prescott CPU Support /AGP 8X /6-CH Audio Solution

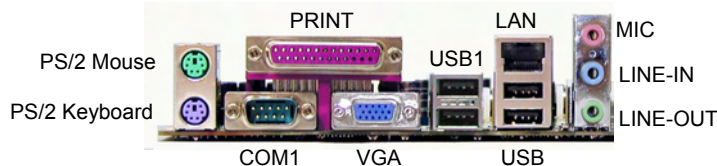

6-Channel AC'97 Codec
Support Front, Rear, Center-Base Speaker Output
Support SPDIF In/Out

LAN
Realtek RTL8100C PCI LAN Controller
Support 10/100 BASE T transfer rate Ethernet connection

ATA100 IDE Connector
Support 100 MB/s data transfer rate

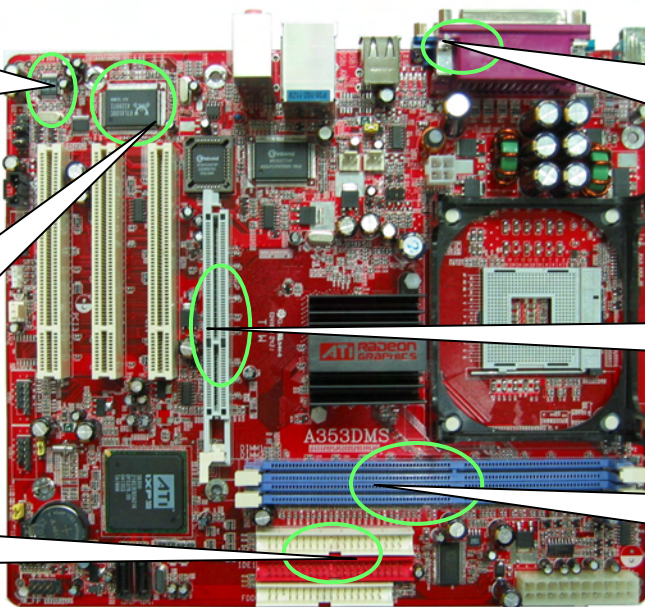

On board VGA
Integrated 2D/3D Graphic Engine. Support 16/32/64 MB frame buffer using system memory

AGP 8X Slot
Support 4X/8X AGP VGA Card

DDR Module Socket
Support DDR266/DDR333/DDR400 DRAM Max. 2GB

<p>Processor</p> <ul style="list-style-type: none"> - μPGA 478B Socket for Intel Pentium®4 478 Pin processor/Prescott CPU, support 400/533/800MHz System Bus Frequency <p>Chipset</p> <ul style="list-style-type: none"> - ATI RADEON 9000 PRO IGP (RC350) North Bridge - ATI IXP 300 South Bridge <p>Expansion Slot</p> <ul style="list-style-type: none"> - Support 3xPCI Slot - 1x AGP Slot (Support 0.8V/1.5V AGP 4X/8X VGA card) <p>System Memory</p> <ul style="list-style-type: none"> - 2 x 184-pin DDR Module Socket Support Max 2GB DDR266/DDR333/DDR400 DRAM Module <p>Magic Setting</p> <ul style="list-style-type: none"> - Support CPU Front Side Bus step by step setting in BIOS SETUP let users have many choice when use over-clock function <p>On board LAN</p> <ul style="list-style-type: none"> - Realtek 8100C PCI LAN Controller for operate 100/10 BaseT Fast Ethernet /Ethernet - Support IEEE 802.3 Dual Channel DMA 	<p>Ultra DMA 100</p> <ul style="list-style-type: none"> - Support 2 x Ultra DMA 100 IDE Interface (Up to 4 IDE Devices & 100MB/s transfer rate) - ATAPI IDE CD-ROM, CD-R,CD-RW and LS-120 Support <p>PC'99 Colorful I/O Ports</p> <ul style="list-style-type: none"> - 8xUSB 2.0 Ports, 1xSerial Ports, 1xParallel Port - 1xPS/2 Keyboard Port, 1xPS/2 Mouse Port, 1xFloppy Port - 1xLine-in/out/MIC Ports <p>On Board VGA</p> <ul style="list-style-type: none"> - 32/64/128MB frame buffer using system memory - Internal AGP 8X performance - 128bit 2D/3D graphics engine - 24bit true-color RAMDAC up to 250MHZ pixel - <i>Optional Cable for S-Video/ RCA TV-Out</i> <p>On Board Audio</p> <ul style="list-style-type: none"> - Software Audio Controller with Onboard 6-Channel CODEC Compliant to AC97' - Support 3D Surround & Positioning, Full Duplex - <i>Optional Cable for SPDIF-In/Out</i> <p>Dimension</p> <p>Micro ATX form factor (24.5cm x 21.0cm)</p>	<p>Special Function</p> <ul style="list-style-type: none"> • ACPI supporting for OS Directed Power Management <ul style="list-style-type: none"> - MODEM Ring remote wake up - RTC Alarm, Keyboard Power On - Software power off - Power button • Meets PC 99 Requirements • PC Health Monitor CPU temperature, System temperature, System voltage (Vcore,Vtt,Vcc3,5V,12V.....), FAN speed <p>Trademark</p> <p>* Product and Company names mentioned herein may be the trademarks of their respective owners.</p>
---	---	---