


NC9F-H61

1. INTEL® H61 Chipset
2. Support INTEL® LGA 1155 2nd Generation Intel® Core i7 / i5 / i3 / Pentium Processor
3. 2 * Dual Channel SO-DIMM DDR3-1333/1066 up to 8GB
4. 19V DC-in Power-on-Board
5. Support CPU Smart FAN
6. Supports 1 * Gigabit LAN
7. Supports ACPI S3 Function
8. Support Watch dog Technology
9. Thin Mini ITX form factor

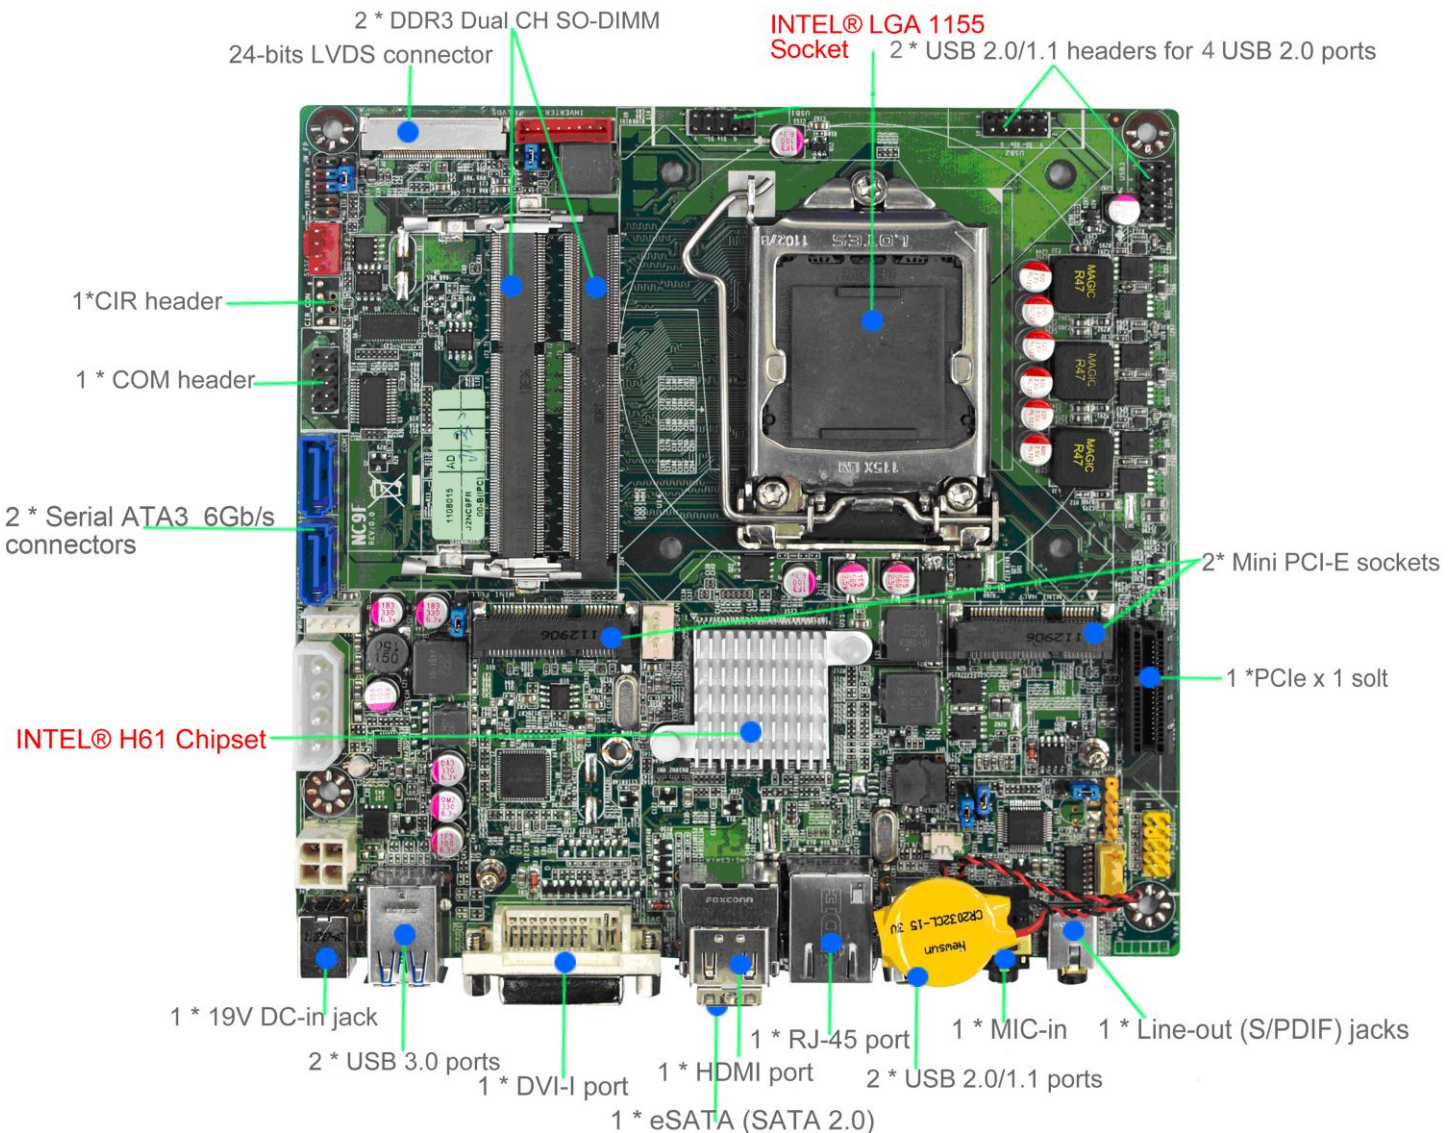

Board Specifications

| | |
|---------------------------|---|
| ■ CPU | ■ INTEL® LGA 1155 2nd Generation Intel® Core i7 / i5 / i3 / Pentium Processor |
| ■ Chipset | ■ INTEL® H61 Chipset |
| ■ Memory | ■ 2 * SO-DIMM Sockets Dual Channel DDR3 1066/1333 SDRAM up to 16 GB |
| ■ Expansion Slots | ■ 1 *PCIe x 1 |
| ■ Storage | ■ 2 * Serial ATA2 3Gb/s connectors ■ 2 * MINI PCI-E sockets (1 for half size & 1 for full size) |
| ■ Audio | ■ Realtek ALC892 7.1-Channel HD Audio CODEC |
| ■ Ethernet LAN | ■ Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN *1 |
| ■ USB | ■ Embedded 6 * USB 2.0/1.1 & 2 * USB3.0 |
| ■ Special Features | ■ Support ACPI S3 ■ Support CPU Smart FAN ■ Support Watch Dog |
| ■ Rear Panel I / O | ■ 2 * USB 2.0/1.1 ports ■ 2 * USB 3.0 ports ■ 1 * eSATA (SATA 2.0) ■ 1 * HDMI ■ 1 * 19V DC-in jack ■ 1 * RJ-45 port ■ 1 * DVI-I port ■ 1 * MIC-in & 1 * Line-out (S/PDIF) jacks |
| ■ Internal I / O | ■ 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports ■ CPU /System Fan connectors; ■ 1 * COM header ■ 1 * eDP ■ 1 * 24-bits Dual CH LVDS & 1 * Inverter connector ■ 1 * CIR header ■ 1 * AUDIO header ■ 1 * Front panel header ■ 1 * Speaker header ■ 1 * FPD Brightness connector ■ 1 * 4-pin ATX Power connector |
| ■ BIOS | ■ AMI 32MB DIP Flash ROM |
| ■ Form Factor | ■ Thin Mini ITX Form Factor (170mm x 170mm) |
| ■ Functional | ■ ATM, POS, AIO, Digital Signage |
| ■ Certificate | ■ CE, FCC, RoHS |
| ■ Temperature | ■ Operating within 0~60 centigrade ■ Storage within -20-85 centigrade |

*For further information please visit the website at <http://www.jetwaycomputer.com>

*The Specification may be changed without further notice.

Product Accessories

