



# JC205-B-J9F2-Extreme Barebone

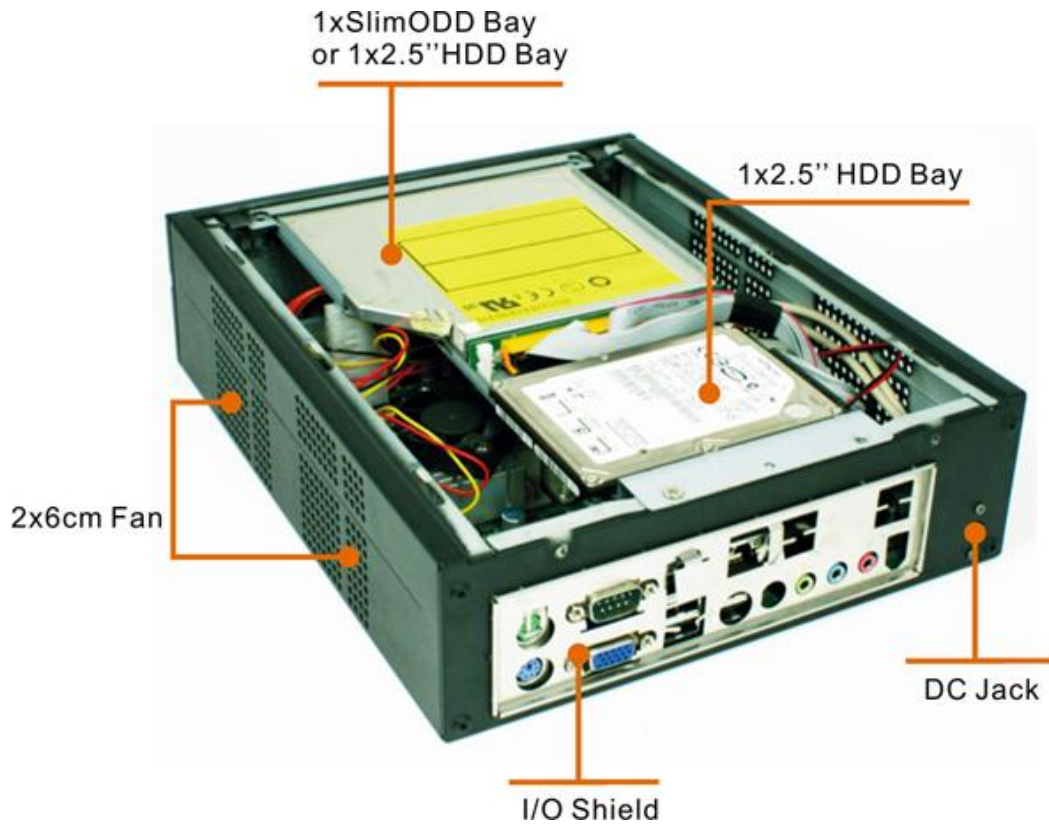


## System Front

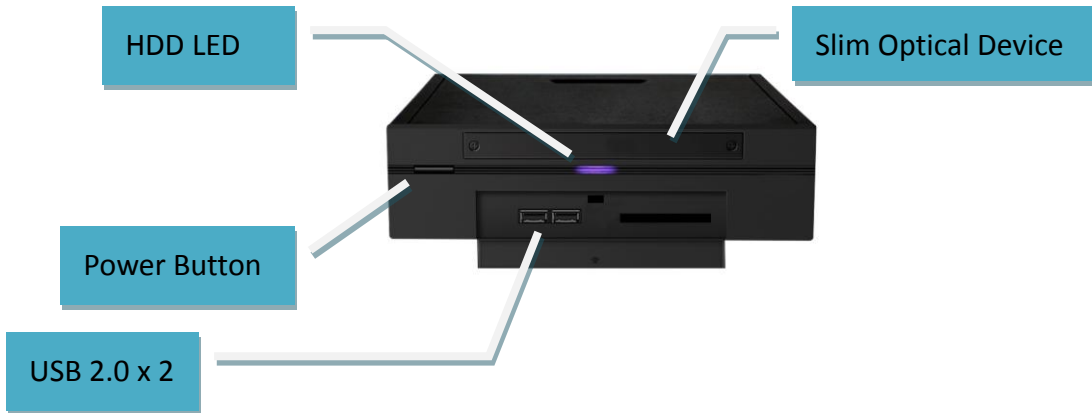


## Chassis Spec

<b>Model No</b>	JC-205-B
<b>Dimension</b>	210 x 257 x 65mm (DxWxH)
<b>Form Factor</b>	Mini-ITX Form Factor, M/B 170 x 170mm
<b>Specs Exposed</b>	1 x Slim ODD Drive Bay and 1 x 2.5" Drive Bay
<b>Colors</b>	Black Color
<b>Cooling Fan</b>	Side: 6cm Fan ( <b>Ball Bearing</b> ) x 2
<b>Front I/O Port</b>	2 x USB (V2.0), 1 x CF port
<b>Power supply</b>	120W DC Open Frame Power
<b>Standard Accessory</b>	<ol style="list-style-type: none"> <li>1. IDE Converter Card (For Slim ODD Drive) x1</li> <li>2. 120W AC-DC Adapter x1</li> <li>3. Power Cord x1</li> <li>4. Stand x4</li> <li>5. IDE CABLE (2.54mm To 2.00mm) x1</li> <li>6. PCI Bracket (COM Port Hole) x1</li> </ol>
<b>Functional</b>	Set Top Box, Thin Client, Car Entertainment, Smart Mini PC, POS/POI, KIOSK, HTPC, Nettop
<b>Packing</b>	<p>2 in 1 Box Dimension : 432*296*320mm</p> <p>2 in 1 Gross Weight : 7.6Kg</p> <p>Color Box Dimension : 417*467*288mm</p> <p>Gross Weight : 3.44Kg</p> <p>Net Weight : 2.875Kg</p>



## Motherboard Spec

<b>Form Factor</b>	Mini-ITX 170 mm x 170 mm
<b>CPU</b>	Support Intel Core 2 Duo ,Core Duo , Core Solo Mobile Processor Support Low Voltage Edition Package type :479
<b>Memory</b>	2 * Dual Channel 240-pin DIMM Sockets for unbuffered DDR2 667 SDRAM up to 2 GB
<b>Chipset</b>	Intel 945GM North bridge Chipset and Intel ICH7M South bridge Chipset
<b>Power Management</b>	ACPI S3 Compliant ,supports power saving mode
<b>PCI enhanced IDE</b>	2 * Ultra DMA 100 / 66 IDE Devices Support
<b>Serial ATA Interface</b>	2 Serial ATA2 Devices Support
<b>VGA Interface</b>	Intel Graphics Media Accelerator 950
<b>Video Memory</b>	Share Memory up to 224MB
<b>LVDS Interface</b>	Onboard 18-bit dual channel LVDS connector
<b>Audio Interface</b>	Realtek ALC888 6-Channel Audio CODEC
<b>LAN Interface</b>	Dual Realtek RTL8111B 10 / 100 / 1000 PCI-E LAN
<b>Extended Interface</b>	1 * 32-bit PCI Slot 1 * Mini PCI 1 * Mini PCI Expressx1
<b>Internal I/O Port</b>	1 * High Speed USB Connectors @ 480 Mbit / s for 2 USB 2.0 Ports 1 * CPU Smart Fan, 2 * DC Fan Connectors 1 * CD / AUX Audio in & SPEAK Out 1 * TV Out Connector / 1* LVDS Connector 1 * IEEE 1394a pin-header 1 * IrDA (CIR )
<b>External I/O Port</b>	4 * High Speed USB Connectors @ 480 Mbit / s 1 * DVI-D Port / 1 * D-Sub 15-pin VGA Connector / 1* HDMI Port 2 * Serial COM Ports / 2 * RJ45 Connectors / 1 * Audio I / O
<b>BIOS</b>	Award 4 MB Flash ROM
<b>Power Requirement</b>	Standard 24-Pin ATX Power supply
<b>Dimension</b>	170mm x 170mm
<b>Temperature</b>	Operating within 0~60 centigrade Storage within -20-85 centigrade

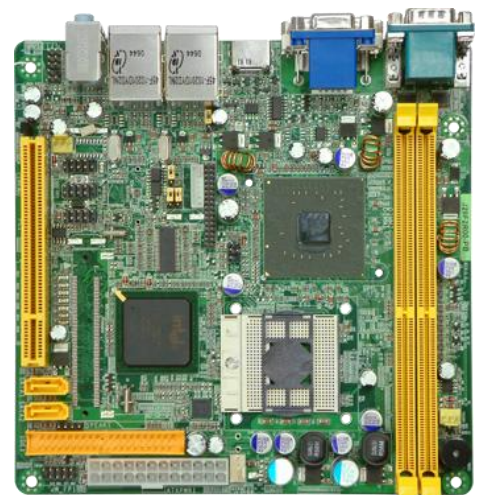

\* For further information please visit us at <http://www.jetwaycomputer.com> & <http://www.jetway.com.tw>

\* The Specification may be changed without further notice.

\* To contact us, please call at (510) 857 - 0130