


**JC300-B-J7F5M1G2E-VDE-PB Barebone**

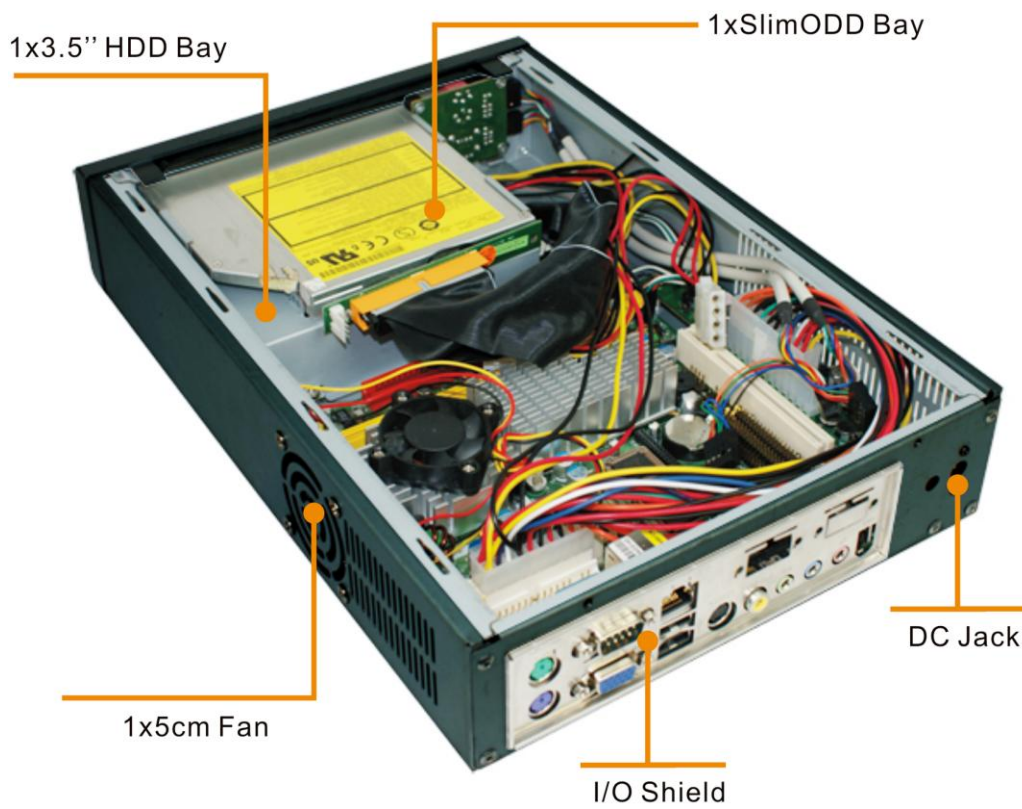

## Chassis Spec

<b>Model No</b>	JC-300-B
<b>Dimension</b>	321 x 220 x 60mm (D*W*H)
<b>Form Factor</b>	Mini-ITX Form Factor, M/B 170 x 170mm <b>(Support INTEL Original ATOM D945GCLF 17*17cm M/B)</b>
<b>Specs Exposed</b>	1 x Slim ODD Drive Bay and 1 x 3.5" HDD Drive Bay
<b>Colors</b>	Black Color
<b>Cooling Fan</b>	Side: 5cm 2Ball Bearing Fan x 1
<b>Front I/O Port</b>	2 x USB(V2.0), Speaker & Microphone JACK
<b>Power supply</b>	100W DC-DC Power Converter
<b>Standard Accessory</b>	<ol style="list-style-type: none"> <li>1. IDE Converter Card (For Slim ODD Drive) x1</li> <li>2. 60W AC-DC Adapter x1</li> <li>3. Power Cord x1</li> <li>4. Stand x1</li> <li>5. IDE CABLE (2.54mm To 2.00mm) x1</li> </ol>
<b>Functional</b>	Set Top Box, Thin Client, Car Entertainment, Smart Mini PC, POS/POI, KIOSK
<b>Packing</b>	<p>4 in 1 Box Dimension : 415*320*540 mm</p> <p>Gross Weight : 12.4KG</p> <p>Net Weight : 10KG</p> <p>Color Box Dimension : 390*130*290 mm</p> <p>Gross Weight : 2.9KG</p> <p>Net Weight : 2.5KG</p> <p>136pcs/pallet</p>

			
Stand *4	DC-DC Power Kit	IDE Converter Card*1	5cm 2BALL Bearing Fan
			
2.54mm to 2.0mm IDE cable	60W AC-DC Adapter		

<b>Model No</b>	J7F5M1G2E-VDE-PB
<b>CPU</b>	Embedded VIA Eden CPU 1.2GHz @ 7W <b>Fanless</b> Support VIA V4 FSB: 400MHz
<b>Memory</b>	1 * 240-pin DIMM Sockets for unbuffered DDR2-533 RAM up to 1 GB
<b>Chipset</b>	VIA CX700M Single Chipset
<b>Power Management</b>	ACPI S3 Compliant ,supports power saving mode
<b>PCI enhanced IDE</b>	2* Ultra DMA 133 / 100 / 66 IDE Devices Support
<b>Serial ATA Interface</b>	2 Serial ATA2 HDDs with RAID 0, 1 Function Support
<b>VGA Interface</b>	VIA Unichrome Pro II
<b>Video Memory</b>	Share Memory up to 128MB
<b>Audio Interface</b>	VIA VT1708A 6-Channel <b>HD</b> Audio CODEC
<b>LAN Interface</b>	VIA VT6122 10 / 100 / 1000 PCI LAN
<b>Extended Interface</b>	1 * 32-bit PCI Slot 1 * PCI 120-Pin Adapter Connector With <b>Expansion Daughter Boards</b>
<b>Internal I/O Port</b>	2 * High Speed USB Connectors @ 480 M-bit / s for 4 USB 2.0 Ports 1 * CPU Smart Fan Connector, 2 * Chassis Fan Connectors 2 * 9-Pin COM Port Connector / 1 * CD / AUX Audio in & SPEAK Out 1 * <b>HDTV</b> Out Connector 1 * IrDA (SIR) / 1 * 6-pin Video Input Pin-header 1 * PCI 120-Pin Adapter Conn.
<b>External I/O Port</b>	2 * High Speed USB Connectors @ 480 M-bit / s 1 * DVI Port / 1 * D-Sub 15-pin VGA Connector 1 * PS / 2 Mouse & 1 * PS/2 Keyboard / 1 * RJ45 Connector / 1 * Audio I / O 1 * IEEE 1394a Connector
<b>BIOS</b>	Award 4 MB Flash ROM
<b>Power Requirement</b>	Standard 24-Pin ATX Power supply
<b>Dimension</b>	170mm x 170mm
<b>Temperature</b>	Operating within 0~60 centigrade Storage within -20-85 centigrade



\*For further information please visit the website at <http://www.jetwaycomputer.com/>

\*The Specification may be changed without further notice.