


# HB368F21-S

Fanless Elkhart Lake Embedded Barebone  
N6210 Dual-Core / 3\*DP / 27mm / 12-36V



## Features

- Fanless Embedded Barebone System with Planned Lifecycle Through Q1'2036
- Great for Entry Level Digital Signage
- Intel Elkhart Lake N6210 Dual-core Processor
- Supports DDR4-3200 up to 32GB Total Memory
- Up to 3 Displays, 3 \* DP 1.4 4K @60Hz
- M.2 SATA/PCIE 3.0 x2 NVME, 2\*M.2 for WIFI & Cellular
- 2 \* Realtek 1GbE
- Watchdog Timer, 12-36V DC-In, 40W AC Adapter
- Includes Wall & DIN Mounting Brackets

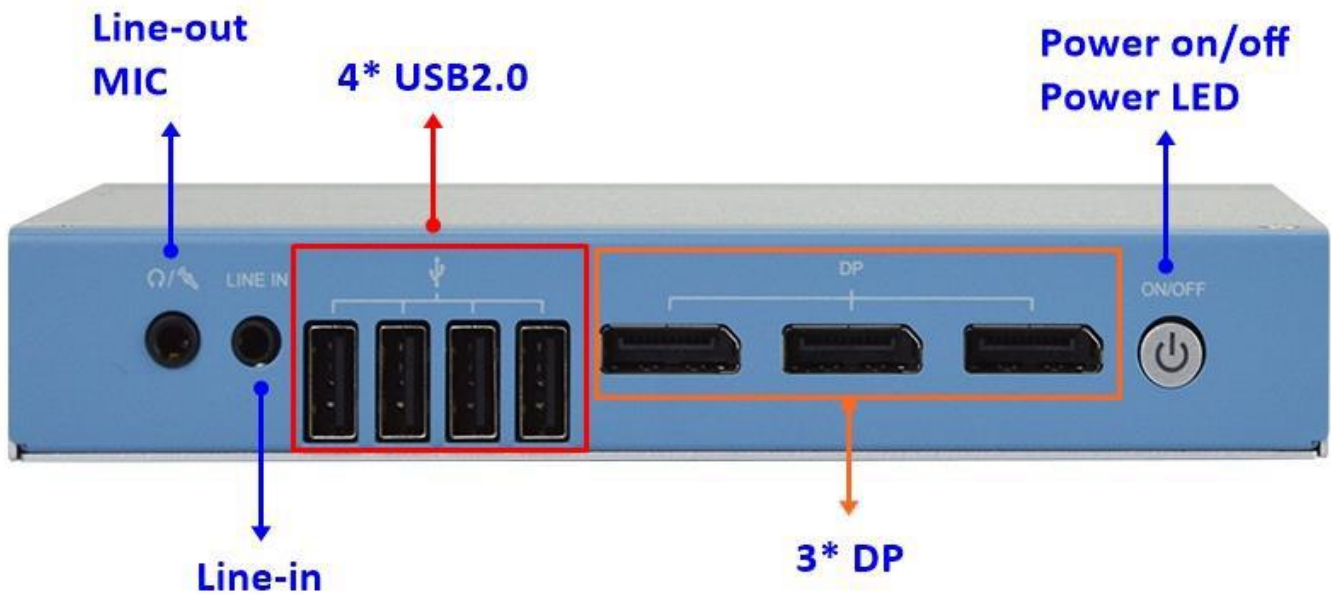

<b>Model</b>	<ul style="list-style-type: none"> <li>■ HB368F21-S</li> </ul>
<b>Part No</b>	<ul style="list-style-type: none"> <li>■ HB368F21-6210-S</li> <li>■ HB368F21-6210-SE (32GB EMMC)</li> <li>■ HB368F21-6210-SE (32GB EMMC, WIFI)</li> <li>■ HB368F21-6210-ST (32GB EMMC, TPM2)</li> <li>■ HB368F21-6210-ST (32GB EMMC, TPM2, WIFI)</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>■ Fanless Intel Celeron N6210 Dual-core SoC, Elkhart Lake</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>■ 1 * DDR4-3200 SO-DIMM up to 32GB total memory</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>■ Optional: 32GB EMMC</li> <li>■ 1 * M.2 M-key SATA &amp; PCIE 3.0 x2 NVME 2242/2280</li> </ul>
<b>Network</b>	<ul style="list-style-type: none"> <li>■ 2 * Realtek RTL8119I 1GbE LAN</li> <li>■ WIFI Model: includes M.2 AC-WIFI+BT card</li> <li>■ Non-WIFI Model: open M.2 E-key 2230 slot (USB/PCIE)</li> <li>■ M.2 B-key 3042/3052 (USB3) with SIM card slot for Cellular</li> </ul>
<b>Other Features</b>	<ul style="list-style-type: none"> <li>■ AHCI, Watchdog Timer 10-255 min/sec., AT/ATX Power Mode, Optional TPM2</li> </ul>
<b>Front Panel I/O</b>	<ul style="list-style-type: none"> <li>■ 4 * USB 2.0 Type-A, Power button and LED</li> <li>■ 3.5mm Line-out/Mic combo jack</li> <li>■ 3.5mm Line-in jack</li> <li>■ 3 * Displayport 1.4 4K @60Hz</li> </ul>
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>■ 2 * RJ45</li> <li>■ 12-36V DC-in locking jack, Grounding Screw</li> <li>■ (side) 4 * Antenna holes</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>■ AMI UEFI Flash ROM with Intel fTPM (PTT) TPM 2.0 Emulation</li> </ul>
<b>Box Contents</b>	<ul style="list-style-type: none"> <li>■ 40W 12V AC Adapter, US Power Cord, Wall/DIN Mount Brackets, Antenna (WIFI model)</li> </ul>
<b>Compliance</b>	<ul style="list-style-type: none"> <li>■ CE, FCC, RoHS, ErP Ready</li> </ul>
<b>Temperature</b>	<ul style="list-style-type: none"> <li>■ Operating Temperature -20 - 60° C</li> <li>■ Storage Temperature -40 - 85° C</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>■ 106 x 160.2 x 27mm (DxWxH)</li> </ul>
<b>OS Support</b>	<ul style="list-style-type: none"> <li>■ Windows 10 64bit, Windows 11 64Bit, Linux</li> </ul>
<b>Warranty</b>	<ul style="list-style-type: none"> <li>■ 2 Years limited warranty</li> </ul>

\*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.



**Jetway Computer Corporation**  
**Phone: 510-857-0130 Fax: 510-857-0138**  
**8058 Central Ave., Newark, CA 94560**  
**www.jetwaycomputer.com**

