


P5MP

VIA P4X400/VT8235 CHIPSET with AGP 8x slot /
6-CH AC'97 CODEC /ATA133 /USB2.0 /LAN Support
Pentium 4 processor Micro ATX Main Board

Prescott CPU Support /AGP 8X /6-CH Audio Solution

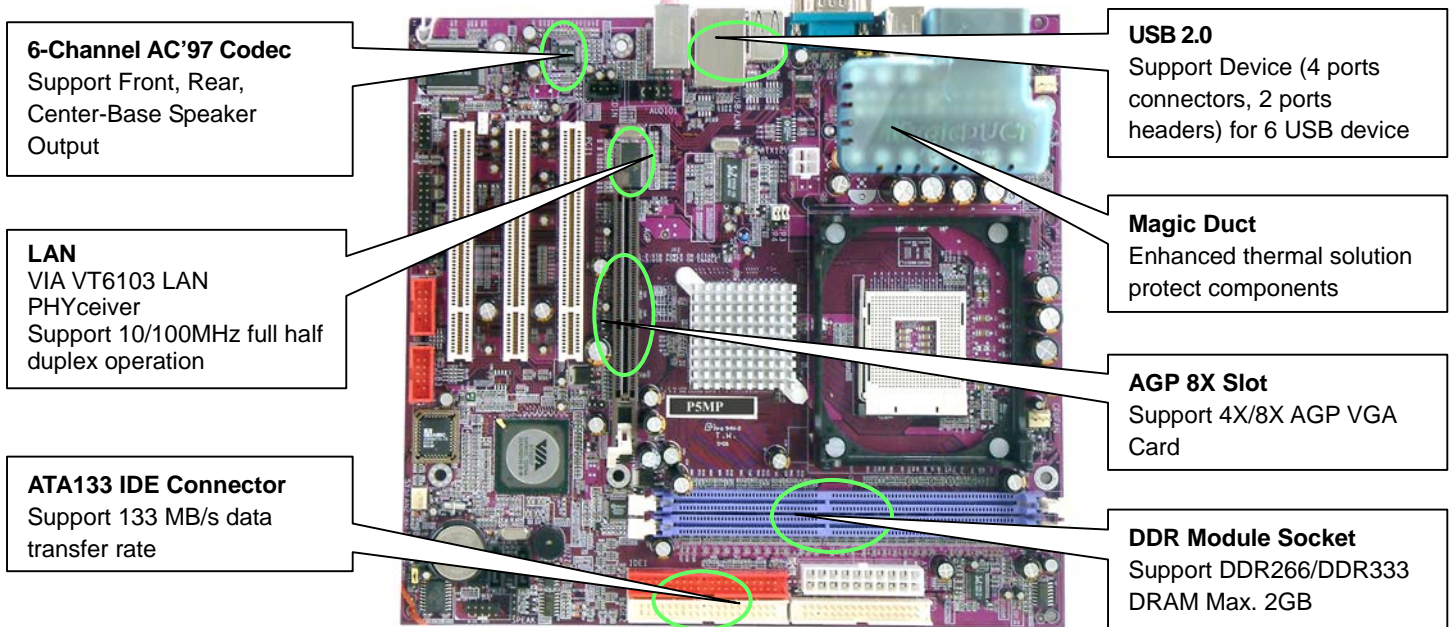

Processor

- μ PGA 478B Socket for Intel Pentium®4 478 Pin processor, support 400/533MHz System Bus Frequency, support Prescott CPU

Chipset

- VIA P4X400 Memory Controller Hub (MCH) North Bridge
- VIA 8235 South Bridge

Expansion Slot

- Support 3xPCI Slots
- 1xAGP Slot support AGP 8X

System Memory

- 2 x 184-pin DDR Module Socket Support Max 2GB DDR266/DDR333 DRAM Module

Magic Duct

- Enhanced thermal solution to protect MOSFET from burnt out

Magic Setting

- Support CPU Front Side Bus step by step setting in BIOS SETUP let users have many choice when use over-clock function

Ultra DMA 133

- Support 2 x Ultra DMA 133 IDE Interface (Up to 4 IDE Devices & 133MB/s transfer rate)
- ATAPI IDE CD-ROM, CD-R, CD-RW and LS-120 Support

PC'99 Colorful I/O Ports

- 6xUSB2.0 Ports 2xSerial Ports, 1xParallel Port
- 1xPS/2 Keyboard Port, 1xPS/2 Mouse Port, 1xFloppy Port
- 1xGame/MIDI Port, Line-in/out/MIC Ports

On Board LAN

- Standard MII interface to external PHYceiver
- 10/100 MHz full and half duplex operation

On Board Audio

- Software Audio Controller with Onboard 6-Channel CODEC Compliant to AC97'
- Support 3D Surround & Positioning, Full Duplex

Dimension

Micro ATX form factor (24.4cm x 22.0cm)

Special Function

- ACPI supporting for OS Directed Power Management
 - MODEM Ring remote wake up
 - RTC Alarm, wake On LAN, Keyboard Power On
- Support ATX12V Power Supply
- PC Health Monitor CPU temperature, System temperature, System Voltage (Vcore, Vtt, Vcc3, 5V, 12V.....), FAN speed
- Power Fail Recovery support
- Earphone Amplifier support
- Magic BIOS Utility support live Update BIOS function from web

Trademark

- * Product and Company names mentioned herein may be the trademarks of their respective owners.